

Evolution Series

750D

Reference DAC/CD Transport

Dual-mono Balanced Design



The **MOON 750D** features the most advanced digital technology; The first true 32-bit fully asynchronous digital audio playback system to reach the retail marketplace. Intended to fulfill the demands of the most discerning music connoisseur, the **750D** is a fully balanced design featuring our own **M-AJiC32** circuitry (an asynchronous jitter elimination system) built around the ESS Technology SABRE³² Reference Audio DAC. The conversion process uses an astonishing 8 DAC's per channel working in 32-bit Hyperstream™ (ES9018S). The final result is previously unattainable musical reproduction from digital media, be it a CD, computer, music server, etc. The **MOON 750D** will bring you closer to the music than ever before, offering plenty of flexibility while exemplifying seamless luxury.

The back panel features a complete array of digital input and output connections to meet all the needs of today's ever-widening technologies, allowing for a connection to virtually any digital source. The front panel includes a disc drawer for our own proprietary drive mechanism which represents a fifth input. As well, an optional outboard power supply will be made available to further enhance the already astonishing performance of the **MOON 750D**.


Of course, all of the signature features you would expect in a MOON Evolution series digital product are present: our **M-Quattro** floating suspension, SimLink™, **i²DCf**, just to name a few, as well as both RS-232 and IR ports for custom-install environments.

Significant Design Features:

- ▲ Proprietary CD drive system mounted on our **M-Quattro** gel-based 4-point floating suspension.
- ▲ Separate digital and analog power supplies, each with their own toroidal transformer.
- ▲ Power supply voltage regulation includes **i²DCf** (Independent Inductive DC Filtering); 1 inductor for each and every IC in the audio circuit's signal path – 24 stages in all.
- ▲ Four (4) digital inputs (AES/EBU, S/PDIF, TosLink and USB) allowing for a connection to virtually any digital source.
- ▲ Two (2) digital outputs – AES/EBU and S/PDIF.
- ▲ Optional **820S** external power supply.

Specifications:

Frequency response (full range)	2Hz - 100kHz +0/-3dB
THD @ 1kHz, OdBFS (A-weighted)	< 0.0003%
Intermodulation distortion	< 0.0002%
Dynamic Range	> 120dB
Signal-to-noise Ratio	> 120dB @ full output
Channel Separation	> 116dB
Intrinsic Jitter	1 picosecond RMS
Maximum Analog Output @ OdBFS	2.0 Volts
Analog output impedance	100Ω
Bit-depth range	16 - 24 bits
Sampling rate frequency range	44.1 - 192kHz
Shipping weight	35 lbs / 16 Kgs
Dimensions (width x height x depth)	18.75 x 4.0 x 16.8 in. 476 x 10.2 x 42.7 cm.

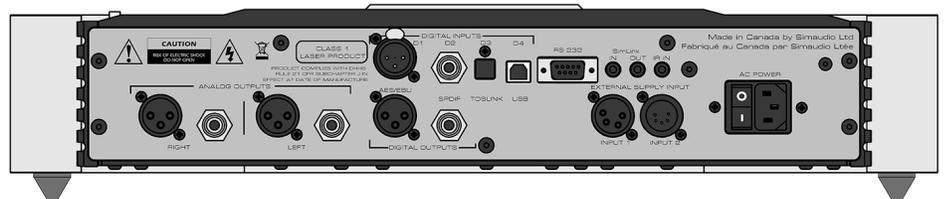


M O O N

MUSICAL ECSTASY

simaudio.com

Available Finishes



Black



Silver



2-Tone

